# Specification Sport Multifilx Advanced V2 System

| | |
|---|---|
| Project Name: | Client : |
| Client Representative : | Consultant : |
| Contractor : | |


**Details:**

Attached are the specifications for the flooring required for the training hall (Sport Multiflex Advanced V2 System), intended to replace the existing flooring. Please note that the actual area of the hall is 600 square meters.

Furthermore, please be advised that the installation process will commence once the subfloor is handed over, fully prepared for the immediate installation of the flooring.

**Specification:**

## Specification of KTL Sport Multiflex Advanced V2 system

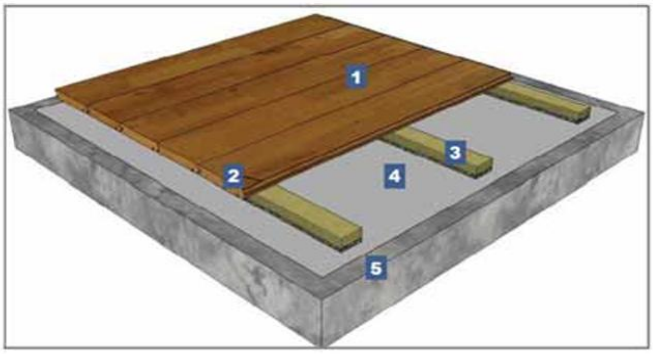


Performance:

FIBA APPROVED EQUIPMENT

FIBA 2000-2023 Level 1 certified
(FIBA License Number WF73-02)

EN 14904, class A4 certified

| | | |
|---|---|---|
| **1.Flooring boards** | : | 22 x 130 x 2180mm solid 2-strip parquet boards, secretly nailed onto battens. |
| **Wood species** | : | Hevea Maple, select and better |
| **2. Nails** | : | 2.2 x 45mm machine nails |
| **3. Sports batten system:** | | KTL sport Multiflex advanced V2, batten profile in laminated veneer lumber (LVL) of pine in 20 x 48 x 3800mm, continuously supported by 10 x 48mm elastic foam strips, glued to a double grooved batten underside. Batten distance (standard): c/c 363.3mm |
| **4. Moisture barrier** | : | 1000-gauge polythene |
| **5. Subfloor** | : | Concrete subfloor, levelled to a minimum deviation of max. +/- 2mm on a 2m straight edge. |